




The **MPplus™** Volume Corrector is a cost reduced, commoditized version of the **XARTU/1™-LDVI** series of volume corrector products featuring:

- Outdoor rated fiberglass enclosure with locking hasps
- Large easy-to-read LCD display with magnetic scroll
- Single or Dual Pressure Inputs
- Standard RTD for temperature measurement
- AGA-5, AGA-7, NX-19, AGA-8 (Detailed & Gross Methods)
- 4-Form A Pulse Outputs
- Optional Pulse Output Board for AMR—AMI Applications to extend battery life
- (2) Pulse Inputs for Dual Meter Configurations
- No wiring required in LDVI meter mounted configuration
- Single line display with magnetic scroll
- Lightweight quick release 6" x 6" x 4" fiberglass enclosure
- Powered by either 1 Watt Solar Panel w/ 6 Volt 4.5ah rechargeable battery or 6 C-Cell replaceable battery pack. Other power options on request.
- Optional LDVI with Universal Turbine and Positive Displacement meter mounting plate that imposes very little drag on the meter index drive
- Available in Single and Bi-Directional Meter Rotation
- Optional Internal 2400bps Modem or External Cellular Phone Support

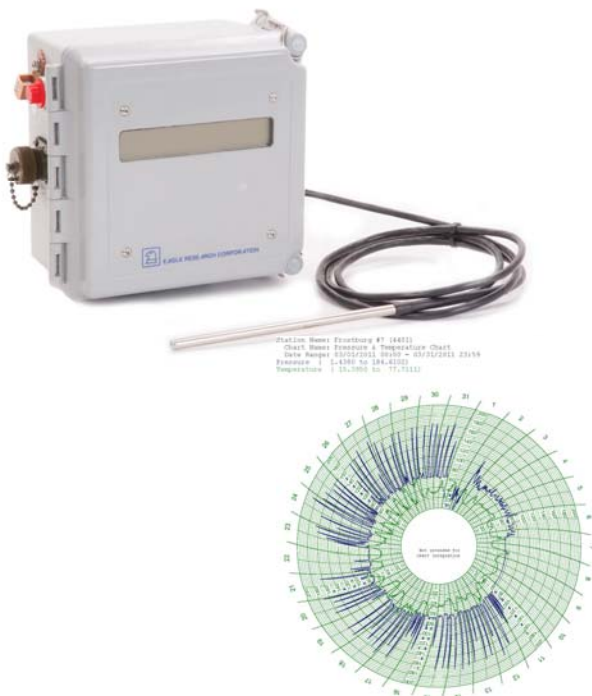

Circular Chart Replacement

The **MPplus™** Pressure & Temperature Recorder is an excellent choice for replacing paper charts at regulator stations throughout your entire system. Historical archiving and trending using any of Eagle's software packages allows easy graphical viewing of pressure fluctuations at regulator stations or load analysis of system use by engineering departments.